






Type HP



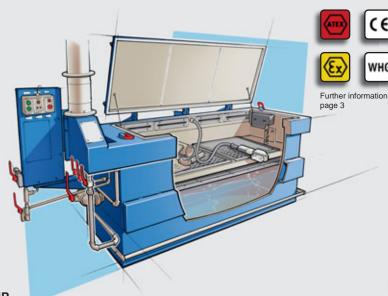



- Explosion proof device, according to ATEX, for manual washing with all common solvents
- Machine with lid and separate solvent reservoir, integrated into housing
- Galvanized grid to place parts to be cleaned
- Safety handbrush with hose and hand-acted throttle valve for controlling the flow rate
- Activation of solvent supply by kick plate (dead man's control)
- Pneumatic diaphragm pump supplies the handbrush and can optionally be used for filling or emptying the device
- · Optical filling level indicator
- Mesh between washing chamber and solvent reservoirs

- Inner exhaust with heavy-duty ventilator and vacuum valve
- Automatic washing program (SPS); including washing – dripping – exhaust; all program steps can be selected individually

Accessories

- · Stainless steel housing
- Upon request washing device for smallest parts
- Autmatic filling and emptying, optionally out of already existing devices or mobile containers
- · Pneumatically operated lid
- Soaking bath device for removing persistent stains





Wash station type HP	Size 12	Size 18	Size 24
Usable width / height / length	600 x 300 x 1200 mm	600 x 300 x 1800 mm	600 x 300 x 2400 mm
Capacity of wash pump	5 m³/h	5 m³/h	5 m³/h
Inner exhaust	2000 m³/h, 1,1 kW	2000 m³/h, 1,1 kW	2000 m³/h, 1,1 kW
	LxWxD	LxWxD	LxWxD
Dimensions mm	2285 x 1180 x 1740	2885 x 1180 x 1740	3485 x 1180 x 1740
Required space mm	3800 x 2700 x 2200	4400 x 2700 x 2200	5000 x 2700 x 2200
Clearance for installation mm	2400 x 1500 x 1800	3000 x 1500 x 1800	3600 x 1500 x 1800