



Distillation unit Type ROTomaX-e

Recovers washing solvent and washing fluids and treats ink residues in a cylindrical distillation boiler featuring a steam-heated floor. The unit is designed for batch operation and continuous operation. High-boiling solvents can be distilled with the available vacuum technology. An agitator/scrapper system rotating slowly in the boiler permanently stirs the contents, keeps the heating surfaces clean to ensure an optimum heat transfer and, at the end of distillation, automatically discharges the residue through the open discharge valve at the bottom of the boiler. With the type-examined agitator/scrapper system and other safety-related details, the unit meets ATEX requirements.

Destillierleistung*:

Typ 15


Typ 20

Typ 30


» 45-90 l/h

» 60-120 l/h

» 90-180 l/h

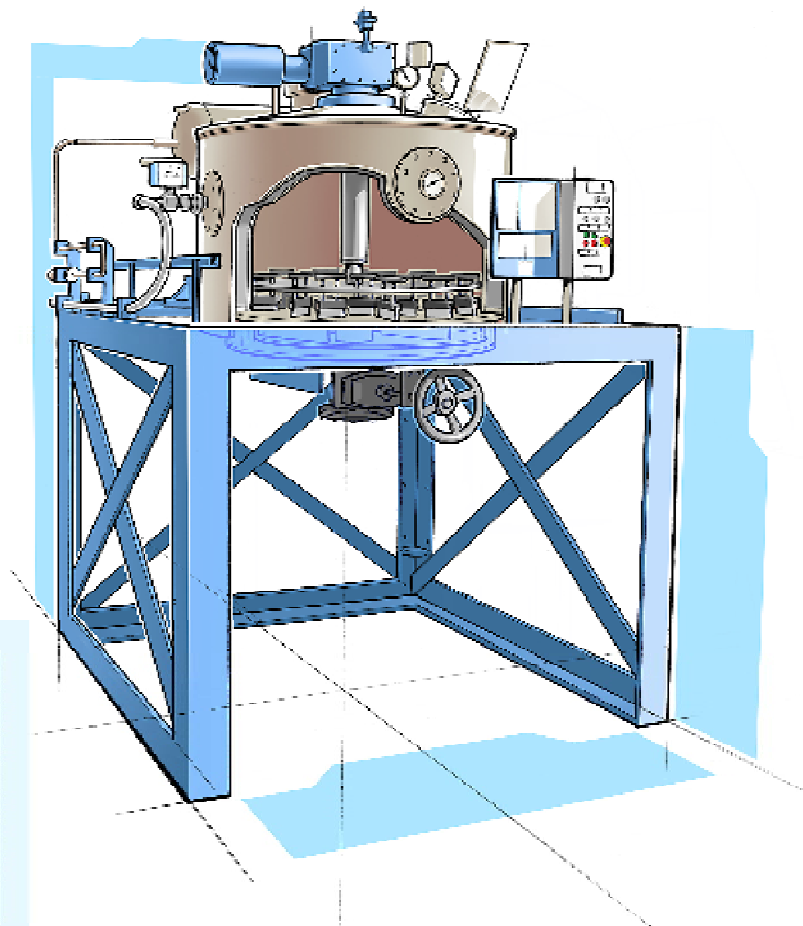

media to be distilled



* (recovery rate varies depending upon type of solvent and solvent contamination.)